


MEGATRONICS v3.0 DATASHEET

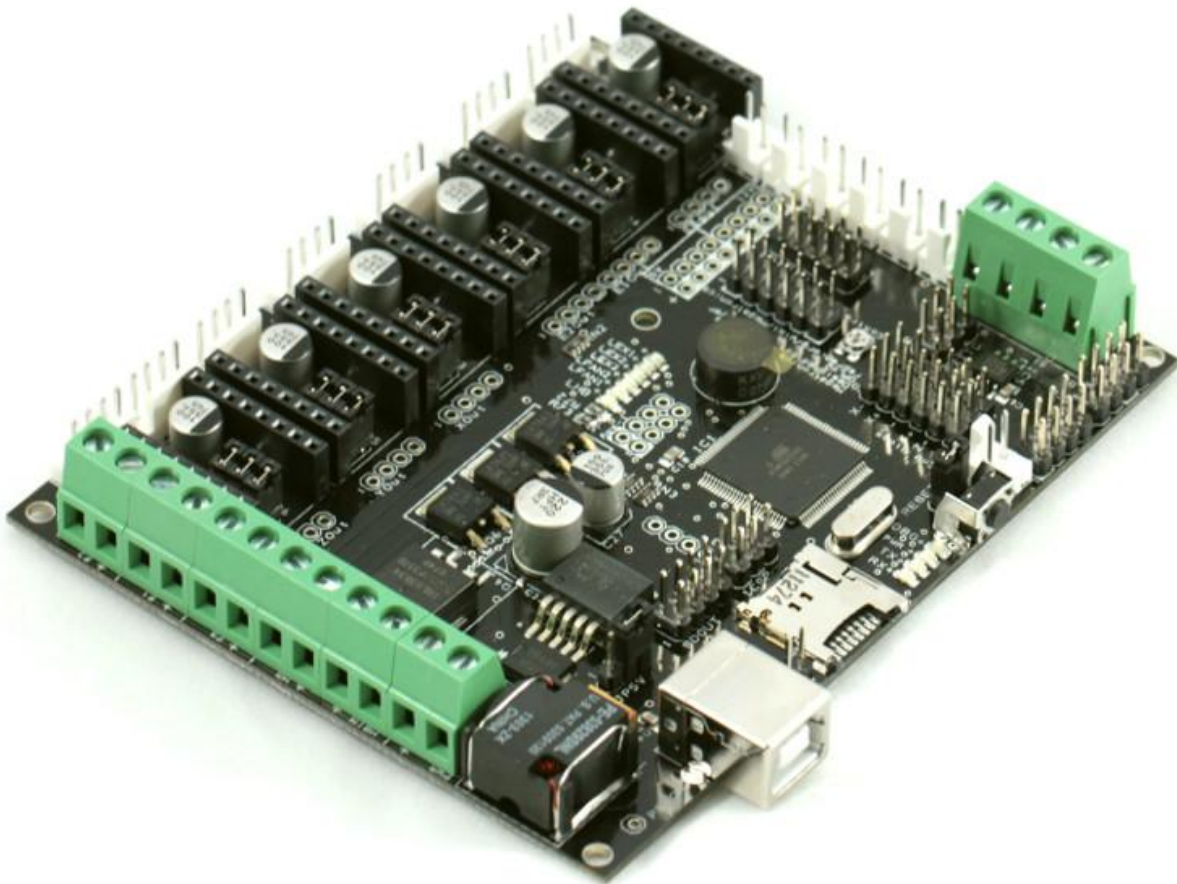


Author Bart Meijer
Date 10th of June 2014
Document version 1.2

PRODUCT OVERVIEW

Megatronics is based on many famous open-source products including: Arduino Mega, RAMPS, SD Ramps. Therefore this product is an already proven design. It combines all major features of these boards into a single board solution for more reliable 3D-printing.

Megatronics has a powerful Atmega2560 processor with 256 kB memory, running at 16MHz. The board can be connected to a PC using a normal USB cable. It will register as FTDI FT232R device. The board is compatible with the Arduino Mega 2560 and will therefore be easily programmed from the Arduino IDE.

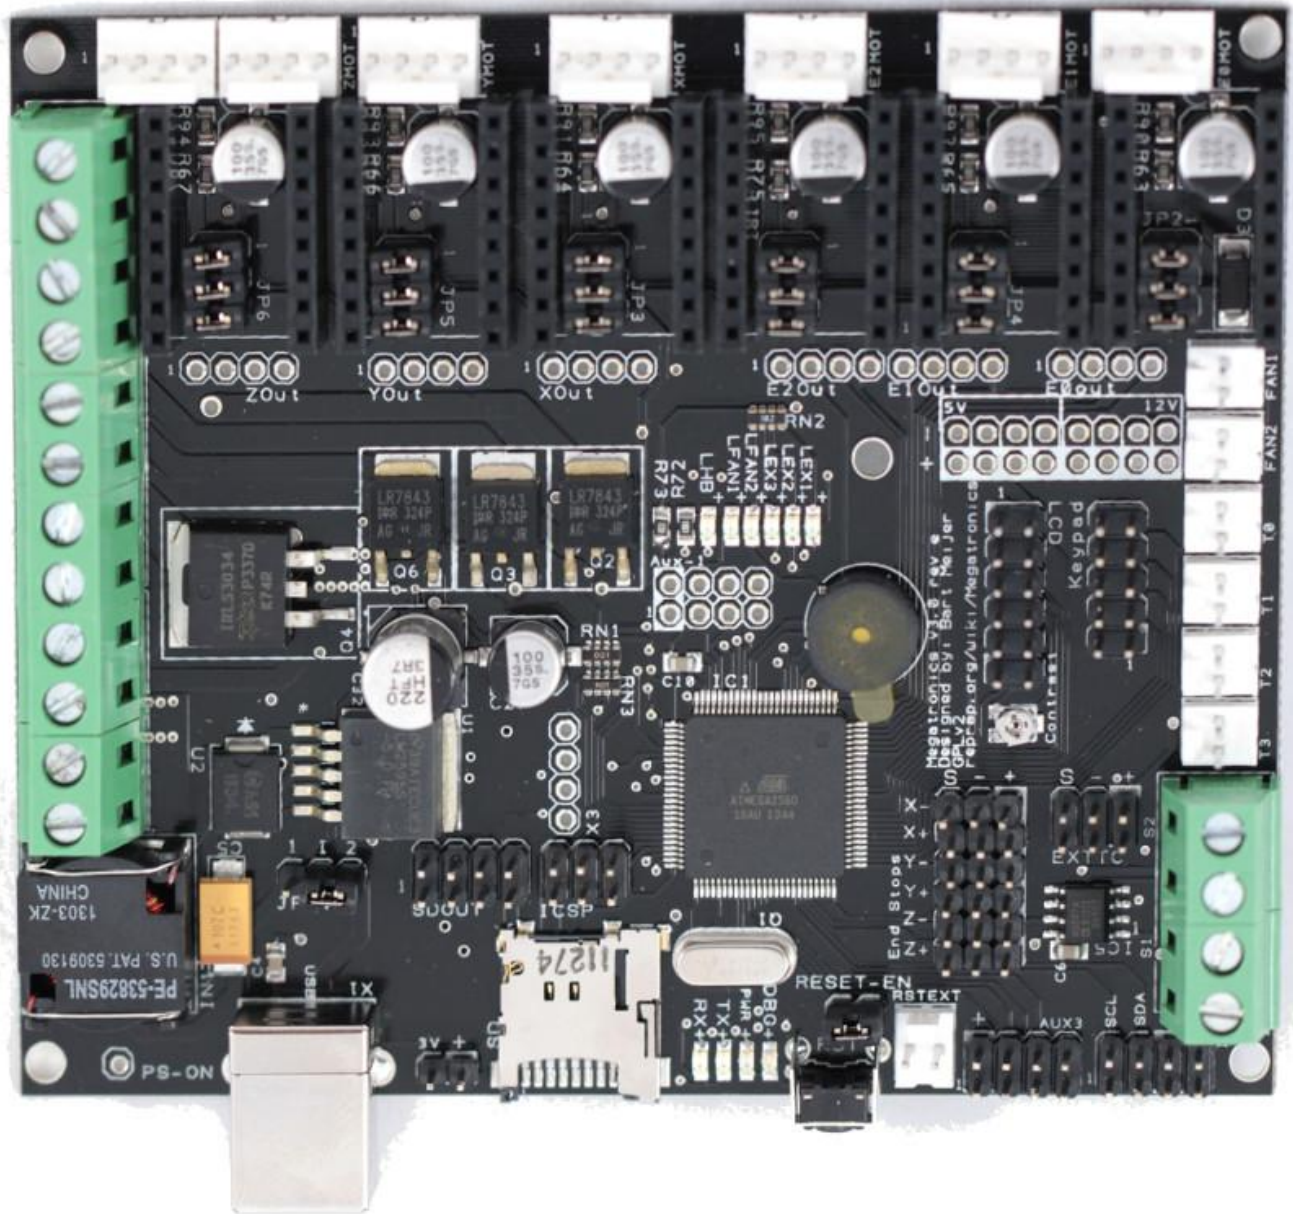

DOCUMENT HISTORY

Version 1.0	Creation
Version 1.1	Adjustments for new board revision
Version 1.2	Fix in pin table + PWM pins marked
Version 1.3	Fix in hole positions for rev F and higher.

PRODUCT CHANGE HISTORY

Version 3.0 – revision F

- ⑩ Minor change in dimensions, now 110.5x91.3mm
- ⑩ Heated bed mosfet better outlined

Version 3.0

- ⑩ Added a fourth thermistor header
- ⑩ Changed motor and thermistor headers to lock headers
- ⑩ Added support for the external SD card pcb
- ⑩ Stand-alone printing also possible when powered from 24V
- ⑩ External reset header added
- ⑩ External thermo couple board support (2x)
- ⑩ Support for 3 extruders, 2 fans and a heated bed on board.
- ⑩ Added more protective features


Version 2.0

- ⑩ Improved thermo couple support.
- ⑩ Second thermo couple supported
- ⑩ Support for 6 stepper drivers
- ⑩ SMD fuses and MOSFETs
- ⑩ Extra MOSFET, making 4 regular MOSFETs and one for heated bed.
- ⑩ Support for the new DRV8825 Pololu stepper drivers

TECHNICAL SPECIFICATION


Microcontroller	Atmega2560-16AU
Operating Voltage Electronics	5V
Operating Voltage High	12-24V (15A heated bed, 7A electronics)
DC Current per I/O Pin	40mA
Clock Speed	16Mhz

MAJOR FEATURES

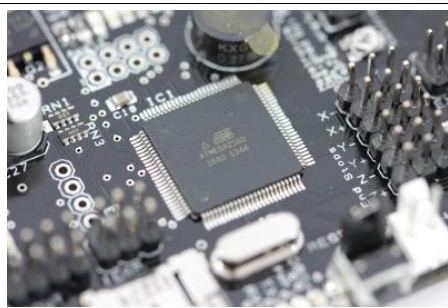

Atmega2560

Powerful Atmega2560 processor with 256 kB memory, running at 16Mhz

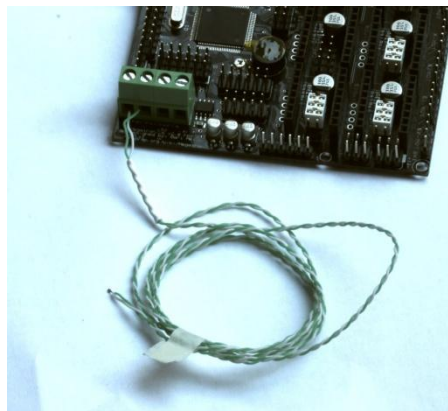


Thermocouple

On board support for connecting two thermo couples two external




SD Card

Autonomous printing from Micro SD card on board or external SD card, using the external SD card PCB module.

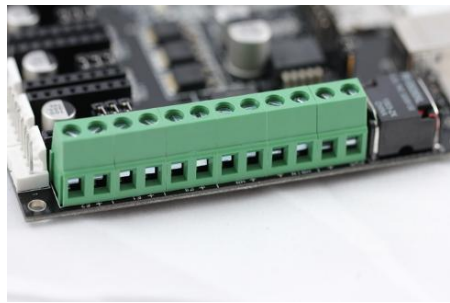


Six MOSFETs

The board has 3 regular MOSFETs (25A), two 1A MOSFETs (fans) and one MOSFET for the heated bed (IRLS3034PBF) to support many needs.

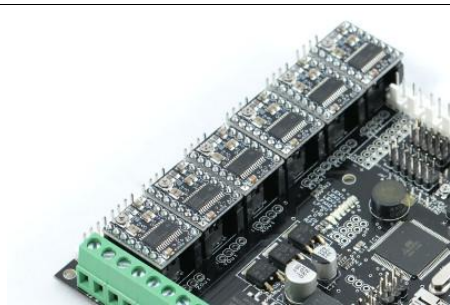

Up to 6 stepper drivers

Compatible with RAMPS, 6 slots for stepper drivers (not included). Modularized to make replacement easy for damaged drivers. Also the new DRV8825 Pololu stepper drivers are supported.

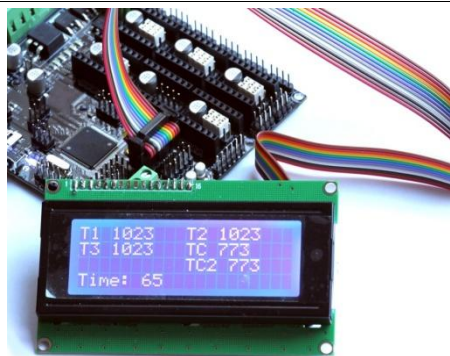


Support for many peripherals

The board's functions can be easily extended with LCD, keypad etc. See the connectors section for more information

OTHER FEATURES

- ⑩ Auto reset can be disabled by removing a jumper
- ⑩ The board's low voltage circuit can be powered from 12-24V, by setting a jumper
- ⑩ The LCD contrast can be adjusted with a trimpot
- ⑩ PWR has a diode to protect against reverse polarization
- ⑩ The 5V line is protected by a 500mA resettable fuse
- ⑩ A piezo is included to allow the printer to give feedback with sound
- ⑩ Each stepper driver slot has a breakout to connect external stepper drivers to the board.
- ⑩ Four layer high quality PCB board

CONNECTORS

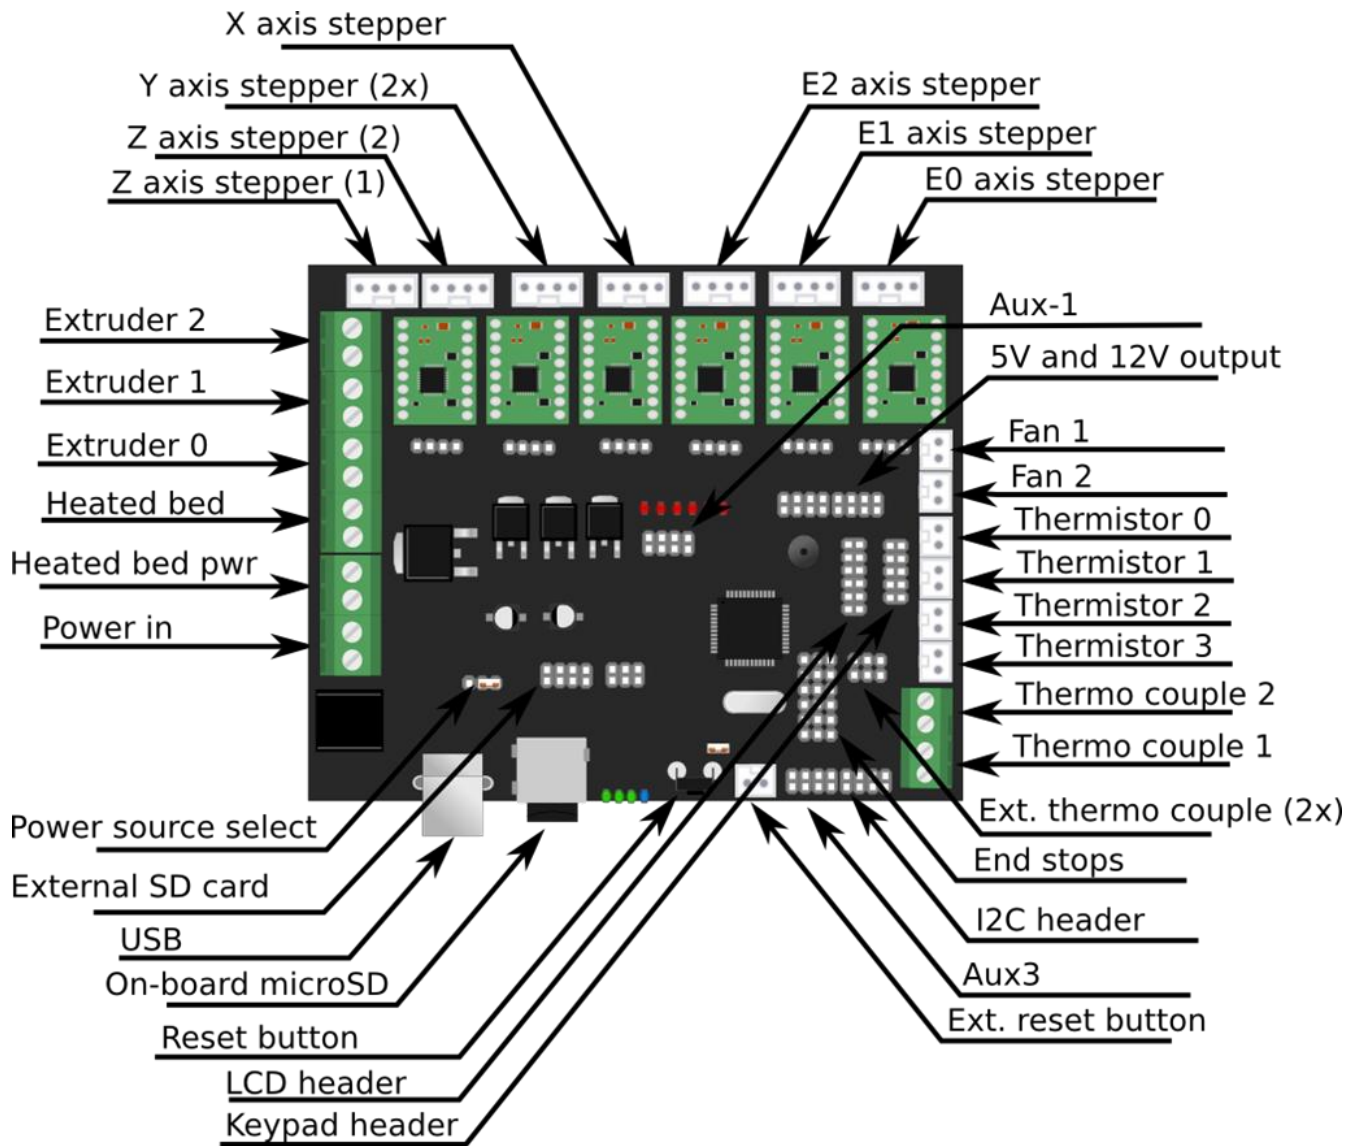

Name	Description
XMOT, YMOT, ZMOT (2x), E0MOT, E1MOT, E2MOT	Connectors for bipolar stepper drivers
JP2-JP7	Microstepping mode jumpers. See your stepper driver documentation for more information.
E0Out – Zout	Breakout headers for stepper slots 1. GND 2. DIR 3. STEP 4. ENABLE

5V	5V output
12V	12V output
FAN1	Fan 1 (1A max)
FAN2	Fan 2 (1A max)
T0	Thermistor 0
T1	Thermistor 1
T2	Thermistor 2
T3	Thermistor 3
S1	Thermo couple 1
S2	Thermo couple 2
Keypad	Keypad (2x5 header) 1. 5V 2. GND 3. D45 4. D33 5. D44 6. D34 7. D43 8. D35 9. D42 10. D36
LCD	LCD Header (2x6 header) 1. GND 2. 5V 3. LCD Contrast 4. D32 5. GND 6. D31 7. D14 8. D30 9. D39 10. D15 11. 5V 12. GND
I2C	I2C header (2x4 header) 1. SCL 2. SCL 3. SDA 4. SDA 5. 5V 6. 5V 7. GND 8. GND
AUX3	Auxiliary header 3 (2x4 header) 1. 5V 2. 5V 3. D49

	<ul style="list-style-type: none"> 4. D48 5. D47 6. D46 7. GND 8. GND
RSTEXT	Header to connect an external reset button.
RESET-EN	When jumpered enables reset (DTR). Without it the board cannot be programmed using the IDE. It's recommended to remove the jumper for production machines.
End stops	6x3 header to connect end stops
SDOUT	<p>External SD card header</p> <ul style="list-style-type: none"> 1. 5V 2. A2 3. MISO 4. MOSI 5. SCK 6. D53 7. GND 8. Not connected
JP5V	<p>Power source select. This determines how the 5V circuit is powered.</p> <ul style="list-style-type: none"> 1: Power from Power In 2: Power from USB
EXTTC	External Thermo couple header
ICSP	2x3 header to program the Atmega chip directly
X3	Breakout for FT232 pins
AUX1	Analog/Serial output (compatible with RAMPS)
PS-On	Header do enable/disable the power supply
E0 - E2	Extruder heater output (5A max)
HB	Heated bed (15A max)
HBIN	Heated bed power (12-24V) *
PWR	Power input (12-24V) *

* Make sure that your peripherals support the input voltage. If you supply 24V, all outputs on the board will supply 24V too.


PIN DEFINITION

This is the digital I/O assignment for Megatronics. You can use it to adjust your firmware to match Megatronics.

Pin	Definition	Pin	Definition
D0	RXD	D38	Y+ End stop
D1	TXD	D39	LCD6
D2	Extruder 0 *	D40	X+ End stop
D3	Z axis enable *	D41	Y- End stop
D4	Y axis enable *	D42	Keypad D42
D5	Y axis step *	D43	Keypad Shift clock
D6	Fan *	D44	Keypad encoder (2)
D7	Fan 2 *	D45	Keypad encoder (1) *
D8	Extruder 2 *	D46	AUX3-6 *
D9	Extruder 1 *	D47	AUX3-5
D10	Heated bed *	D48	AUX3-4
D11	Z axis direction *	D49	AUX3-3
D12	PS-on *	D50	MISO
D13	Debug LED	D51	MOSI *
D14	LCD 4	D52	SCK
D15	LCD 7	D53	SS
D16	Z axis step	A0/D54	AUX1
D17	Y axis direction	A1/D55	AUX1
D18	Z- End stop	A2/D56	SDOUT
D19	Z+ End stop	A3/D57	X axis direction
D20	SDA	A4/D58	X axis step
D21	SCL	A5/D59	X axis enable
D22	E2 axis step	A6/D60	E2 axis direction
D23	E2 axis enable	A7/D61	Speaker
D24	E1 axis direction	A8/D62	Thermo couple 4
D25	E1 axis step	A9/D63	Thermo couple 3
D26	E1 axis enable	A10/D64	Thermo couple 2
D27	E0 axis direction	A11/D65	Thermo couple 1
D28	E0 axis step	A12/D66	Thermistor 4
D29	E0 axis enable	A13/D67	Thermistor 3
D30	LCD5	A14/D68	Thermistor 2

D31	LCD Enable	A15/D69	Thermistor 1
D32	LCD RS		
D33	Keypad D33		
D34	Keypad shift out		
D35	Keypad shift LD		
D36	Keypad D36		
D37	X- End stop		

BOARD DIMENSIONS

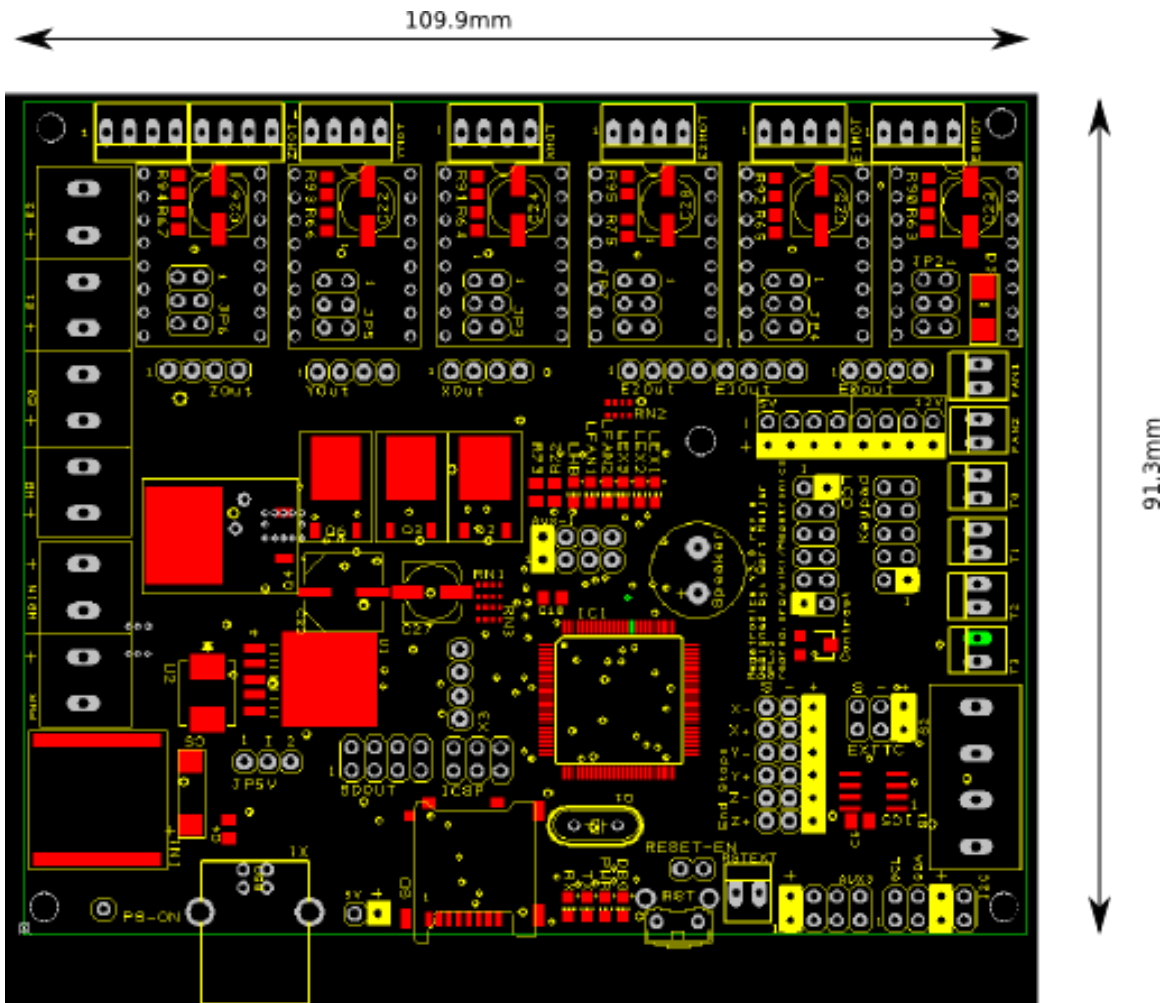

List of M3 holes (measured from the bottom left):

2.3,	3.0
3.0,	88.5
74.3	54.1
107.5	3.0
107.3	89.0

Revision F has new dimensions: 110.5x91.3mm. All holes moved 0.55mm to the right, but the relative distance is the same. New positions:

2.8,	3.0
3.6,	88.5
74.3	54.1
108.1	3.0
107.8	89.0